


Hjälpspänning

Standard	80...270Vac 47...63Hz 100...300Vdc
Tillval	24Vdc 20...60Vdc

Isolation

Kategori	III
Testspänning	2,5kV r.m.s 50Hz/1min Hjälpsp. - RS485/RS232.
	1,5kV r.m.s 50Hz/1min RS485 mot RS232.
	4,5kV r.m.s 50Hz/1min Alla kretsar och jord.

Dimensioner

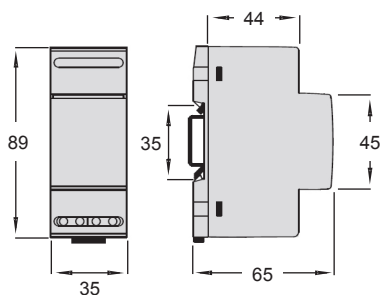

Elektromagnetisk kompatibilitet

Emission	EN 61326
Immunitet	EN 61326

Omgivande miljö

Referenstemperatur ...	23 ± 2°C
Arbetstemperatur	-5 ... 55°C
Lagringstemperatur	-25 ... 70°C

Kapsling


Norm	2 moduler DIN 43880
Anslutningar	Skruv
Montage	DIN skena 35mm
Material	Självslocknande polikarbonat
Vikt	110g

Utgångsmärkning



Uppkoppling mot dator

Serieport
Honkontakt av typ **DE-9**



- 1 DCD (data carrier detect)
- 2 TX (transmit data)
- 3 RX (receive data)
- 4 DTR (data terminal ready)
- 5 GND (signal ground)
- 6 DSR (data set ready)
- 7 RTS (request to send)
- 8 CTS (clear to send)
- 9 RI (ring indicator)

